



Sartolon® 0.2 µm

Sterilizing Grade Filter Cartridges



Description

Sartolon® sterilizing grade filter cartridges are designed for broad chemical compatibility for specific applications in the pharmaceutical and chemical industry. Their superior filtration performance compared to competitive nylon membrane filters allow more economical design of your filtration process.

Applications

Featuring a unique hydrophilic nylon membrane, Sartolon® filters are ideally suited for sterilizing grade filtration of:

- Solvents
- Antibiotics
- Bulk Pharmaceutical Chemicals
- LVP

Compatibility

Sartolon® filter elements are ideal for filtration of a broad range of solvents and liquids containing solvents. The Nylon membrane material provides a broad chemical compatibility especially for aggressive solvent solutions.

Performance

Sartolon® filter elements offer higher total throughputs than any other sterilizing grade Nylon filter element on the market. The heterogeneous double layer construction provides higher total throughputs than homogeneous double layer types due to the "built-in prefiltration".

Microbiological Retention

Sartolon® 0.2 µm rated filter elements are fully validated as sterilizing grade filter elements according to HIMA and ASTM F-838-05 guidelines.

Quality Control

Each individual element is integrity tested by Diffusion and Bubble-Point-Test prior to release, assuring absolute reliability.

Documentation

Sartolon® filter elements are designed, developed and manufactured in accordance with an ISO 9001 certified Quality Management System. A Validation Guide and Extractables Guide are available for compliance with regulatory requirements.

Specifications

Materials

Pre-filter Membrane:	Nylon
End-filter Membrane:	Nylon
Support Fleece:	Polypropylene
Core:	Polypropylene
End Caps:	Polypropylene
O-Rings:	Silicone (optional EPDM or Viton)

Pore Size

0.45 µm + 0.2 µm

Available Sizes | Filtration Area

Cartridges

Size 1	10"	0.6 m ²	6 ft ²
Size 2	20"	1.2 m ²	12 ft ²
Size 3	30"	1.8 m ²	18 ft ²

Mini Cartridges

Size 9	0.2 m ²	2 ft ²
--------	--------------------	-------------------

Available Adapters Cartridges

21, 25, 27, 28

Available Adapter Mini Cartridges

15

Operating Parameters

Max. Allowable Differential Pressure:	5 bar 75 psi at 20 °C
	2 bar 29 psi at 80 °C
Max. Allowable Back Pressure:	2 bar 29 psi at 20 °C

Specifications

Extractables

Sartolon® cartridges meet or exceed the requirements for WFI quality standards set by the current USP.

Regulatory Compliance

100% Individually integrity tested

Integrity test correlated to HIMA/ASTM F 838-05 Bacteria Challenge Test

Non-pyrogenic according to USP Bacterial Endotoxins

Passes USP Plastics Class VI Test

Non-fiber releasing according to 21 CFR

Sterilization

In-Line Steam Sterilization

134 °C, 20 min. at max differential pressure of 0.5 bar | 7 psi

Autoclaving:

134 °C, 2 bar | 29 psi, 30 min

Sterilization Cycles

In-Line Sterilization: Min. 25
Autoclaving: Min. 25

Technical References

Validation Guide:

SPK5716-e


Extractables Guide:

SPK5729-e

Order Information


Order Code	Pore Size [µm]	Pack Size [Pieces]	Test Pressure [bar psi]	Max. Diffusion [ml/min]	Min. Bubble Point [bar psi]
Cartridges					
510**07H1	0.2	1	2.5 36	13	3.0 43.5
510**07H2	0.2	1	2.5 36	26	3.0 43.5
510**07H3	0.2	1	2.5 36	39	3.0 43.5
Mini Cartridges					
5101507H9-----B	0.2	5	2.5 36	4	3.0 43.5

Water Flow Rates for 10", 20" and 30" Cartridges

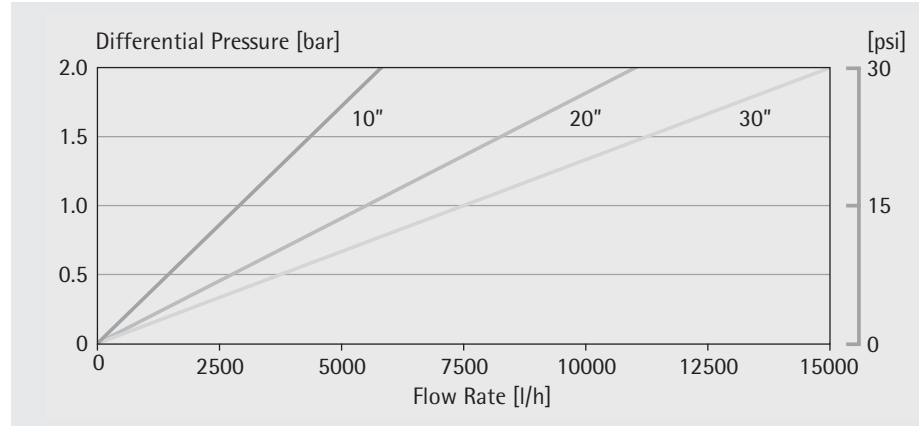

Standardized at 20 °C

Total Throughput Comparison

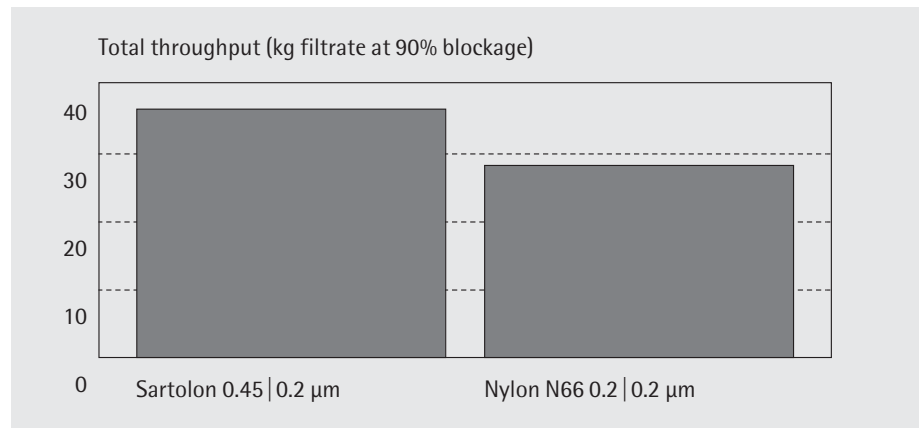

10" Cartridge format

Sartorius Stedim Biotech GmbH

August-Spindler-Strasse 11

37079 Goettingen, Germany

Phone +49.551.308.0

Fax +49.551.308.3289

www.sartorius-stedim.com

USA Toll-Free +1.800.368.7178

UK +44.1372.737159

France +33.442.845600

Italy +39.055.63.40.41

Spain +34.91.3586102

Japan +81.3.3740.5407

Specifications subject to change without notice. Printed and copyrighted by Sartorius Stedim Biotech GmbH W/sart-000 · G
Publication No.: SPK2023-e08108
Order No.: 85030-507-14