



Sartopore® 2 0.2 µm

Sterilizing Grade Filter Cartridges



Description

Sartopore® 2 0.2 µm rated sterilizing grade filter cartridges are designed for filtration of a broad range of pharmaceutical products where compliance with cGMP requirements has to be fulfilled. Sartopore® 2 cartridges feature a unique hydrophilic heterogeneous double layer Polyethersulfone membrane with broad chemical compatibility, high thermal resistance and higher throughput and flow-rate than any other sterilizing grade filter cartridge.

Applications

Typical applications include sterilizing grade filtration of:

- Therapeutics
- Biological Fluids
- Ophthalmics
- SVPs, LVPs
- Antibiotics
- WFI
- Chemicals
- Cleaning and sanitizing agents
- Bulk pharmaceutical products

Compatibility

The polyethersulfone membrane is compatible with a pH range from pH 1 to pH 14 and unaffected by steam sterilization cycles making Sartopore® 2 cartridges ideal for filtration of solutions with high | low pH and for SIP | CIP-cycles.

Performance

Sartopore® 2 cartridges provide an exceptionally high total throughput by fractionated filtration due to the "built-in prefiltration" of the 0.45 µm membrane. The asymmetric pore structure of the polyethersulfone membrane provides high flow rates at low pressure drops.

Wettability

Sartopore® 2 cartridges can be easily wetted out for integrity testing even after drying at 80 °C for 12 hours.

Microbiological Retention

Sartopore® 2 filter cartridges are fully validated as sterilizing grade filter elements according to HIMA and ASTM F-838-83 guidelines.

Quality Control

Each individual element is integrity tested by diffusion and bubble point test prior to release, assuring absolute reliability.

Documentation

Sartopore® 2 cartridges are designed, developed and manufactured in accordance with an ISO 9001 certified Quality Management System. A Validation Guide and Extractables Guide are available for compliance with regulatory requirements.

Specifications

Materials of Construction

Prefilter Membrane:	Polyethersulfone, asymmetric
Endfilter Membrane:	Polyethersulfone, asymmetric
Support Fleece:	Polypropylene
Core:	Polypropylene
End Caps:	Polypropylene
O-Rings:	Silicone (optional EPDM or Viton)

Pore Size

0.45 µm + 0.2 µm

Available sizes | Filtration Area

Cartridges

Size 0	5"	0.3 m ²	3.2 ft ²
Size 1	10"	0.6 m ²	6.5 ft ²
Size 2	20"	1.2 m ²	12.9 ft ²
Size 3	30"	1.8 m ²	19.4 ft ²

Mini Cartridges

Size 7	0.05 m ²	0.5 ft ²
Size 8	0.1 m ²	1.1 ft ²
Size 9	0.2 m ²	2.2 ft ²

Available Adapters Cartridges

21, 25, 27, 28

Available Adapters Mini Cartridges

15, 18

Operating Parameters

Max. Allowable Differential Pressure:	5 bar 72.5 psi at 20°C
	2 bar 29 psi at 80°C
Max. Allowable Back Pressure:	2 bar 29 psi at 20°C

Specifications

Extractables

Sartopore® 2 0.2 µm rated filter cartridges meet, or exceed the requirements for WFI quality standards set by the current USP.

Regulatory Compliance

100% Individually integrity tested

Integrity test correlated to HIMA/ASTM F 838-83 Bacteria Challenge Test

Non-pyrogenic according to USP Bacterial Endotoxins

Passes USP Plastics Class VI Test

Non-fiber releasing according to 21 CFR

Sterilization

In-Line Steam Sterilization:

134 °C, 20 min. at max differential pressure of 0.5 bar | 7.25 psi

Autoclaving:

134 °C, 2 bar | 29 psi, 30 min

Sterilization Cycles

In-Line Sterilization: Min. 25
Autoclaving: Min. 25

Technical References


Validation Guide:

SPK 5732-e

Extractables Guide:


SPK5731-e

Water Flow Rates for 10", 20" and 30" Cartridges

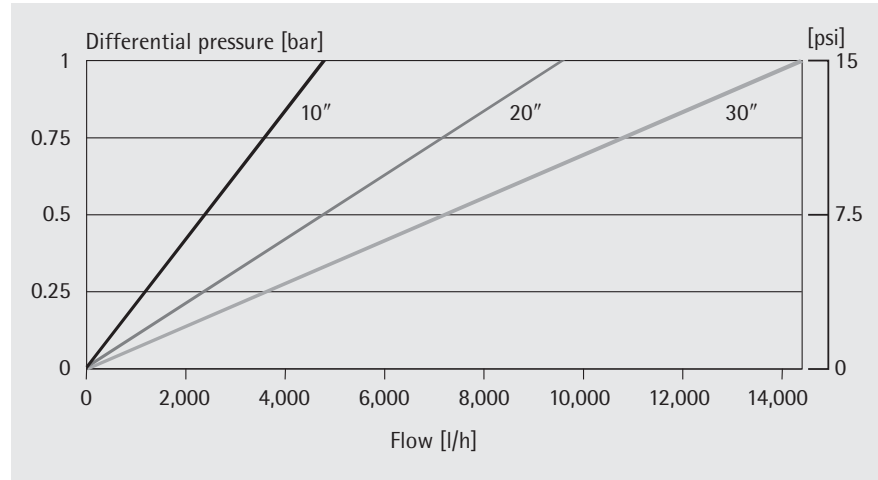

Standardized at 20 °C

Total Throughput Comparison

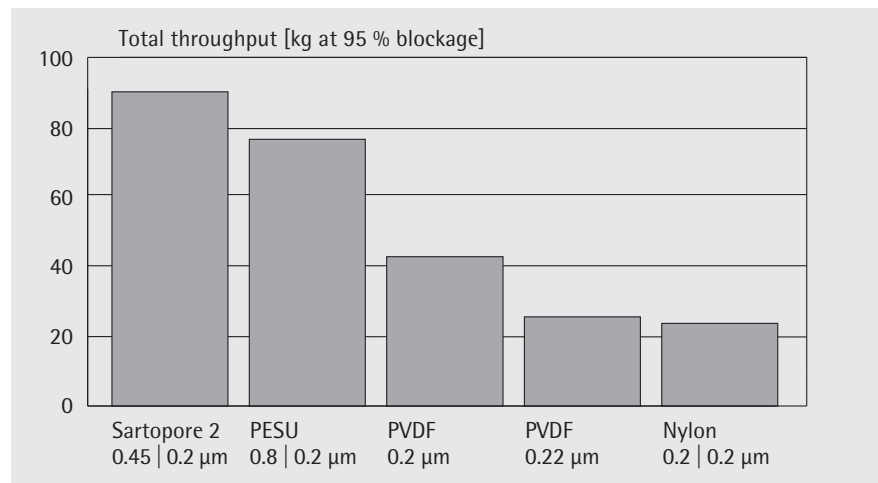

10" Cartridge format

Ordering Information

Order Code	Pore size [µm]	Pack size [Pieces]	Test Pressure [bar psi]	Max. Diffusion [ml/min]	Min. Bubble Point [bar psi]
Standard Cartridges					
544**07H0	0.2	1	2.5 36	10	3.2 46
544**07H1	0.2	1	2.5 36	18	3.2 46
544**07H2	0.2	1	2.5 36	36	3.2 46
544**07H3	0.2	1	2.5 36	54	3.2 46
Mini Cartridges					
544**07H7-----B	0.2	5	2.5 36	4	3.2 46
544**07H8-----B	0.2	5	2.5 36	5	3.2 46
544**07H9-----B	0.2	5	2.5 36	7	3.2 46

** : Adapter Type

Sartorius Stedim Biotech GmbH

August-Spindler-Strasse 11
37079 Goettingen, Germany

Phone +49.551.308.0

Fax +49.551.308.3289

www.sartorius-stedim.com

USA Toll-Free +1.800.368.7178

UK +44.1372.737159

France +33.442.845600

Italy +39.055.63.40.41

Spain +34.90.2110935

Japan +81.3.3740.5407

Specifications subject to change without notice. Printed and copyrighted by Sartorius Stedim Biotech GmbH. | W
Publication No.: SPK2030-e11057
Order No.: 85030-511-67
Ver. 05 | 2011